

## GSR 直立式 85°C 標準型品 Radial Leads, 85°C Standard Series


- 一般尺寸標準型品, 適用於各式小型化電子產品
- 產品壽命保證 2,000 小時/85°C
- Designed in high CV value with smaller size and suitable for consumer electronics products use.
- Life guaranteed 2,000hours/85°C.



### • Specifications

Item	Performance Characteristics												
Operating Temperature range 使用溫度範圍	-40 + 85°C						-25 + 85°C						
Rated Voltage 額定電壓	6.3V ~ 100V						160V ~ 450V						
Capacitance Range 容量範圍	0.1 ~ 22,000 $\mu$ F												
Capacitance Tolerance 靜電容量容許差	$\pm 20\%$ (120Hz, 20°C)												
Leakage Current 洩漏電流	$I \leq 0.02CV$ or 4 $\mu$ A, whichever is greater after 2 minutes application of rated voltage.						$I \leq 0.03CV + 10 \mu$ A, whichever is greater after 2 minutes application of rated voltage.						
Dissipation Factor 散逸係數 (120Hz, 20°C)	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160~250	350~450		
	Tan $\delta$ (max.)	0.24	0.20	0.17	0.15	0.12	0.10	0.10	0.10	0.20	0.25		
	For capacitance of more than 1,000 $\mu$ F, add 0.02 for every increase of 1,000 $\mu$ F.												
Temperature Characteristics 溫度特性 (120Hz)	Impedance Ratio / Stability at Low Temperature												
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160~200	250~350	400	450
	Z (-25°C) / Z (20°C)	5	4	3	2	2	2	2	2	3	4	6	15
	Z (-40°C) / Z (20°C)	12	10	8	5	4	3	3	3	4	8	10	-
Load Life 高溫負荷特性	After 2,000 hours application of WV at 85°C, capacitor shall meet the characteristics requirements mentioned below.												
	Capacitance change	Within $\pm 20\%$ of initial value											
	Tan $\delta$	200% or less of initial specified value											
	Leakage current	Initial specified value or less											
Shelf Life 擺置壽命	After leaving capacitors under no load at 85°C for 1,000 hours and applying voltage according to JIS C5102 and C5141, they shall meet the specified value as load life characteristics listed above.												

### • Dimension

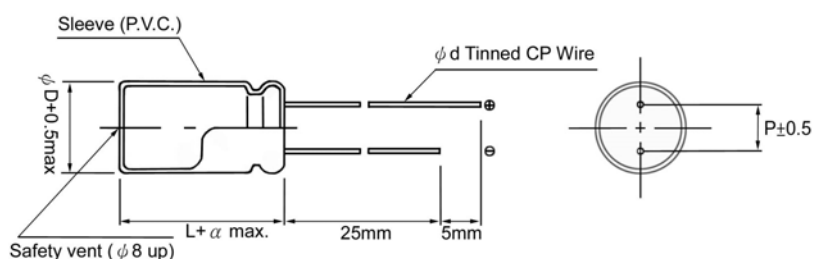

$\phi D$	5	6.3	8	10	13	16	18	20	22	25
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5
$\phi d$	0.5		0.6		0.8		1.0			
$\alpha$	~100WV	1.0		1.5		1.5		2.0		
	160WV~	1.5		2.0		2.0		2.0		

## • Standard Products Table

D $\phi$  x L (mm)

WV(SV) Cap( $\mu$ F)	6.3 (8)		10 (13)		16 (20)		25 (32)		35 (44)		50 (63)		63 (75)		
0.1												5 x 11	1.3		
0.22												5 x 11	2.9		
0.33												5 x 11	4.3		
0.47												5 x 11	6.2		
1												5 x 11	17		
2.2												5 x 11	28		
3.3												5 x 11	35		
4.7												5 x 11	40		
10					5 x 11	50	5 x 11	55	5 x 11	60	5 x 11	60	5 x 11	65	
22	5 x 11	65	5 x 11	65	5 x 11	75	5 x 11	80	5 x 11	90	5 x 11	95	5 x 11	100	
33	5 x 11	80	5 x 11	85	5 x 11	90	5 x 11	95	5 x 11	105	5 x 11	125	6.3 x 11	140	
47	5 x 11	95	5 x 11	100	5 x 11	110	5 x 11	115	5 x 11	130	6.3 x 11	155	6.3 x 11	170	
100	5 x 11	135	5 x 11	145	5 x 11	160	6.3 x 11	190	6.3 x 11	210	8 x 11	260	10 x 12	300	
							5 x 11	180					8 x 11	280	
220	5 x 11	200	6.3 x 11	240	6.3 x 11	260	8 x 11	330	10 x 12	385	10 x 12	430	10 x 16	490	
			5 x 11	220			6 x 11	280	8 x 11	350					
330	6.3 x 11	270	6.3 x 11	290	8 x 11	370	10 x 12	440	10 x 12	490	10 x 16	590	10 x 20	710	
					6.3 x 11	320	8 x 11	390							
470	6.3 x 11	320	6.3 x 11	350	8 x 11	440	10 x 12	550	10 x 16	650	13 x 20	760	13 x 20	900	
											10 x 20	700			
1000	8 x 11	540	10 x 12	650	10 x 16	790	10 x 20	960	13 x 20	1150	13 x 25	1350	16 x 25	1300	
					10 x 12	700	10 x 16	860							
2200	10 x 20	1000	10 x 20	1100	13 x 20	1300	13 x 25	1550	16 x 25	1800	16 x 36	2100	18 x 36	2300	
	10 x 16	890	10 x 16	990	10 x 20	1000					16 x 32	1980			
3300	10 x 20	1190	13 x 20	1450	13 x 25	1700	16 x 25	1980	16 x 36	2280	18 x 36	2500	20 x 40	2700	
									16 x 32	2100					
4700	13 x 20	1550	13 x 25	1800	16 x 25	2100	16 x 32	2450	18 x 36	2700	20 x 40	2900	22 x 50	3400	
							16 x 25	2200	16 x 36	2500					
6800	13 x 25	1920	16 x 25	2250	16 x 36	2650	18 x 36	2900	20 x 40	3000	22 x 50	3500	25 x 50	3900	
					16 x 25	2250	16 x 36	2600	18 x 40	2800					
10000	16 x 25	2350	16 x 36	2700	18 x 36	2950	20 x 40	3000	22 x 50	3700	25 x 50	4000			
			16 x 32	2550	16 x 36	2710	18 x 40	2800							
15000	16 x 36	2850	18 x 36	3100	20 x 40	3400	22 x 50	3800	25 x 50	4300					
	16 x 32	2550	16 x 36	2880	18 x 40	3100									
22000	18 x 40	3350	20 x 40	3700	22 x 50	4200	25 x 50	4500							
	18 x 36	3200	18 x 40	3400	22 x 40	3800									Case Size ripple

Ripple (mA rms) at 85°C 120Hz

## • Standard Products Table

Dφ x L (mm)

WV(SV) Cap(μF)	100 (125)		160 (200)		200 (250)		250 (300)		350 (400)		400 (450)		450 (500)	
0.1	5 x 11	2.1			6.3 x 11	2.1								
0.22	5 x 11	4.7			6.3 x 11	2.7								
0.33	5 x 11	7			6.3 x 11	7								
0.47	5 x 11	10	6.3 x 11	15	6.3 x 11	15	6.3 x 11	15			6.3 x 11	12		
1	5 x 11	21	6.3 x 11	22	6.3 x 11	22	6.3 x 11	22	6.3 x 11	22	8 x 11	25	8 x 11	23
2.2	5 x 11	30	6.3 x 11	33	6.3 x 11	33	6.3 x 11	33	8 x 11	38	10 x 12	45	10 x 12	45
3.3	5 x 11	40	6.3 x 11	40	6.3 x 11	40	8 x 11	46	10 x 12	55	10 x 12	55	10 x 16	45
4.7	5 x 11	45	6.3 x 11	50	8 x 11	55	8 x 11	55	10 x 12	65	10 x 16	70	10 x 20	55
10	6.3 x 11	75	8 x 11	80	10 x 12	95	10 x 16	105	10 x 20	115	13 x 20	130	13 x 20	90
22	6.3 x 11	130	10 x 16	155	10 x 20	170	13 x 20	190	13 x 25	200	16 x 25	240	16 x 25	165
33	8 x 11	180	10 x 20	205	13 x 20	230	13 x 20	230	16 x 25	275	16 x 32	300	16 x 36	230
47	10 x 12	230	13 x 20	270	13 x 20	270	13 x 25	300	16 x 36	380	16 x 36	370	18 x 40	300
68	10 x 12	270	13 x 20	350	13 x 25	350	16 x 25	380	16 x 25	400	16 x 32	340	18 x 36	260
100	10 x 20	370	13 x 25	430	16 x 32	530	16 x 32	520	18 x 40	590	20 x 40	550	22 x 40	350
220	13 x 25	620	16 x 36	800	18 x 36	810	20 x 40	740	22 x 50	850	25 x 50	750		
330	13 x 25	760	18 x 40	940	20 x 40	1130	22 x 50	1170						
470	16 x 25	1000	22 x 40	1410	22 x 50	1490	25 x 50	1600						
1000	18 x 40	1380	25 x 50	1900										
2200	22 x 50	2400												
3300	25 x 50	2900												
	25 x 50	2900												

Ripple (mA rms) at 85°C 120 Hz

## • Frequency coefficient of allowable ripple current

WV	Cap(μF) / Frequency	50 Hz	120 Hz	300 Hz	1 KHz	10 KHz~
6.3~100	~ 47	0.75	1	1.35	1.57	2.00
	100 ~ 470	0.80	1	1.23	1.34	1.50
	1,000 ~ 22,000	0.85	1	1.10	1.13	1.15
160~450	0.47 ~ 220	0.80	1	1.25	1.40	1.60
	330 ~ 1,000	0.95	1	1.10	1.13	1.15

## • Allowable ripple vs. Ambient temperature

Ambient Temp. (°C)	~ +70	+85
Compensating Coefficient	1.27	1.0