


- NOTES:
1. S3 POSITION "A" OF ROTARY SW IS CW
 2. S3 POSITION "D" OF ROTARY SW IS CCW
 3. JP1 AND JP2, BRIDGE LOCATION FOR SOLDERING WIRE

Specifications

- Frequency Range 14 - 30 MHz
- Input VSWR 1.5 to 1 or less
- Amplifier Gain 14 dB minimum
- Operating Temperature 0 - 37.8°C (32 - 100°F)
- IMD -33 dB
- Harmonic Suppression Better than -50 dB, 5 pole Chebyshev filter
- Preamplifier Gain +10 dB
- Electronic Input Attenuator, 4 Stage : Low - 25% rated output
 Medium - 50% rated output
 High - 75% rated output
 Maximum - 100% rated output
- Operation Class A-B
- Modes AM/FM/SSB/CW Fully automatic mode switching
- SSB Delay Control Continuously variable
- RF Input TX-2250 see chart below
- RF Input TX-2250HD see chart below
- RF Output see chart below
- Dimensions/Weight Length 6.25 inches (15.88cm); Width 6 inches (15.25cm); Height 2.5 inches (6.35cm)
- Weight 2.5 lbs. (1.1 kg)
- Power Requirement 13.6V DC @ 20 - 25 Amps Negative Ground

MODEL	INPUT POWER	OUTPUT POWER	AMPS
TX-2250/455	1 - 4 Watts	125 Watts RMS 200 Watts PEP	15
TX-2250/455HD	5 - 10 Watts	125 Watts RMS 200 Watts PEP	15
TX-2250/1446	1 - 5 Watts	125 Watts RMS 250 Watts PEP	23
TX-2250/1446HD	6 - 10 Watts	125 Watts RMS 250 Watts PEP	23
TX-2250/2290	1 - 5 Watts	125 Watts RMS 250 Watts PEP	22
TX-2250/2290HD	6 - 10 Watts	125 Watts RMS 250 Watts PEP	22
TX-2250/2879	1 - 5 Watts	125 Watts RMS 350 Watts PEP	25
TX-2250/2879HD	6 - 10 Watts	125 Watts RMS 350 Watts PEP	25

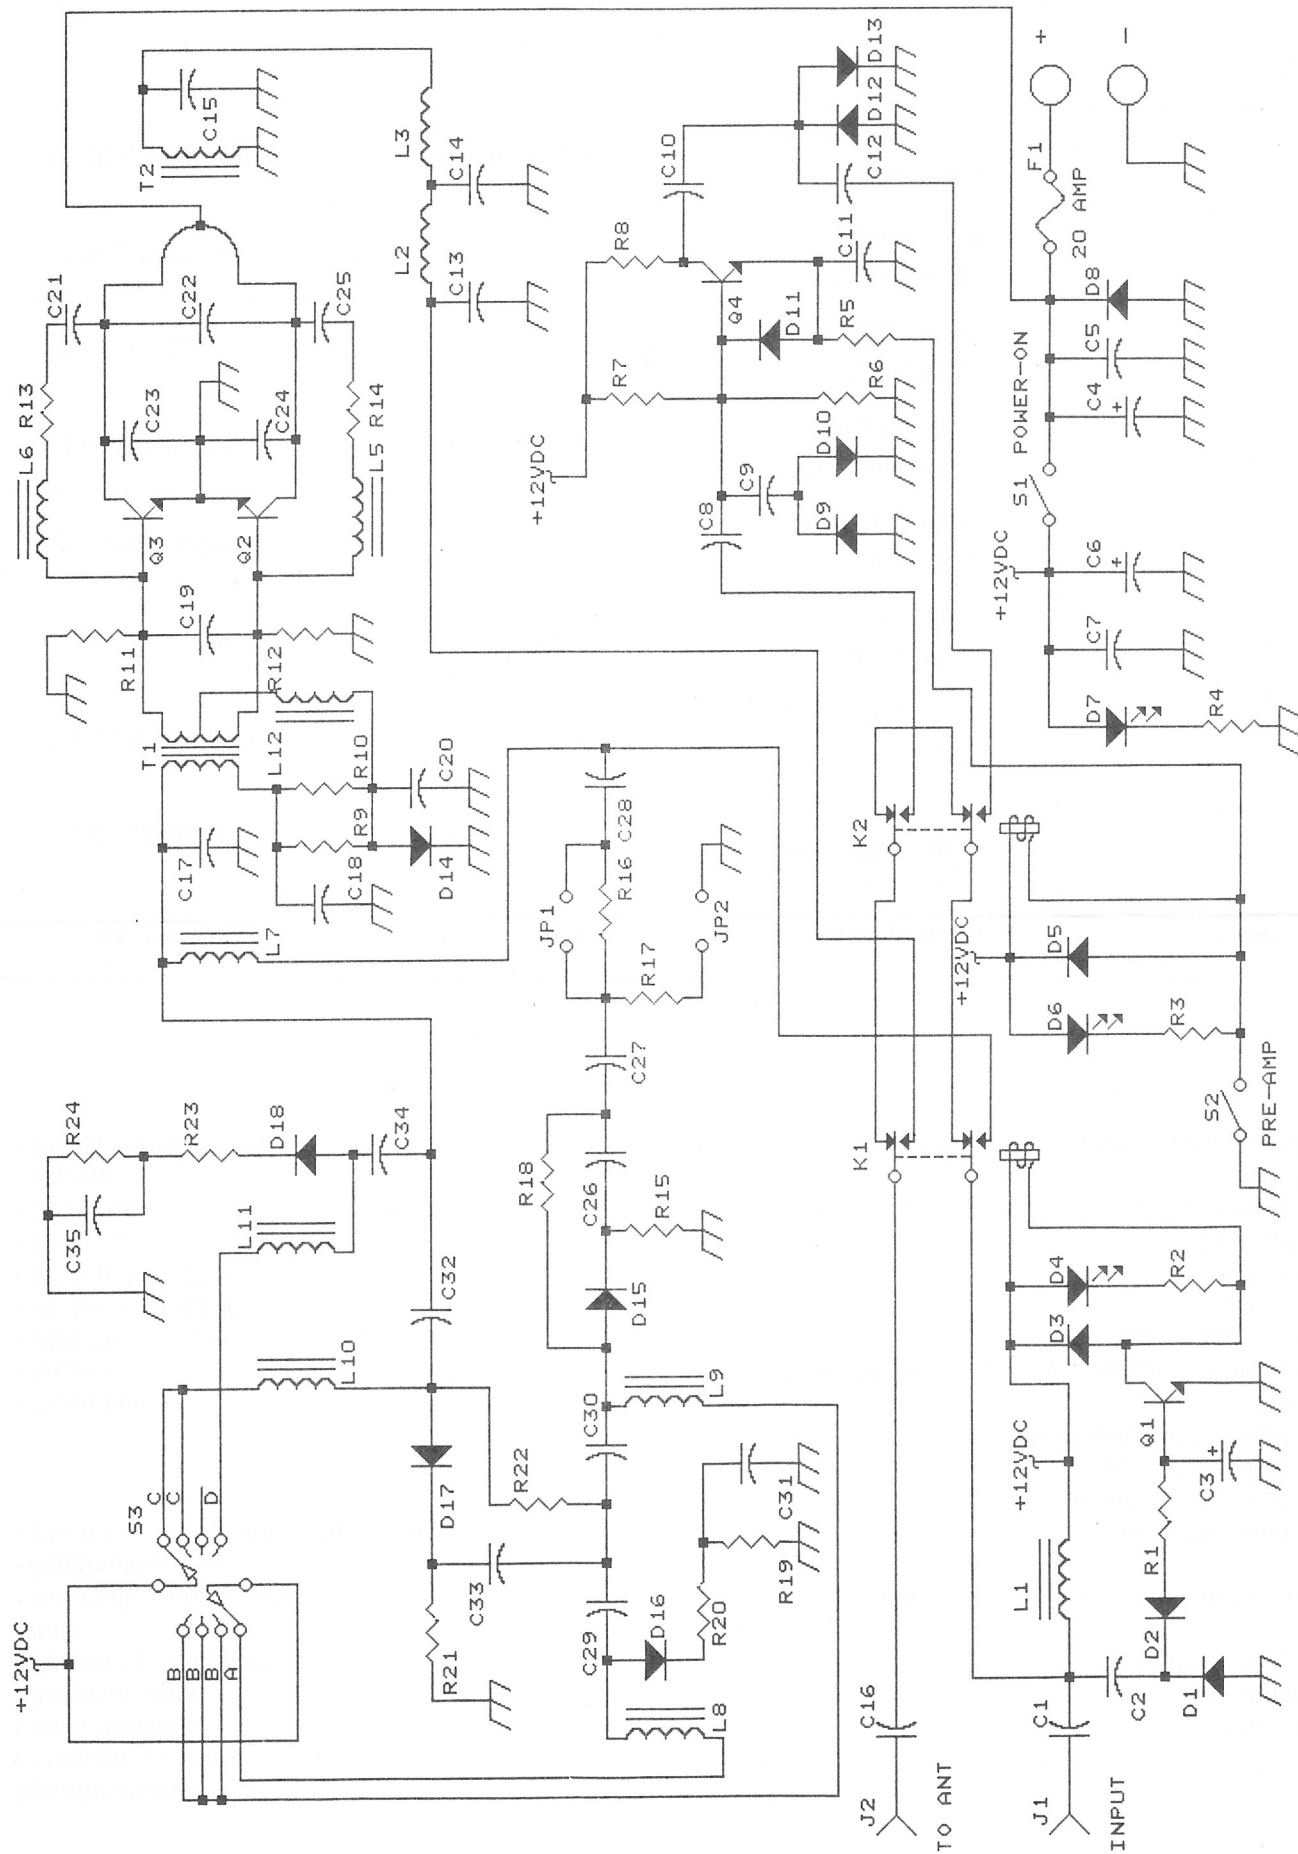

NOTES: 1. S3 POSITION "A" OF ROTARY SW IS CW
2. S3 POSITION "D" OF ROTARY SW IS CCW
3. JP1 AND JP2, BRIDGE LOCATION FOR SOLDERING WIRE