
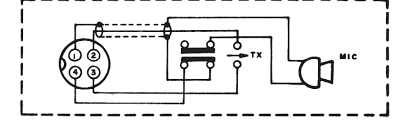


SCHEMATIC DIAGRAM

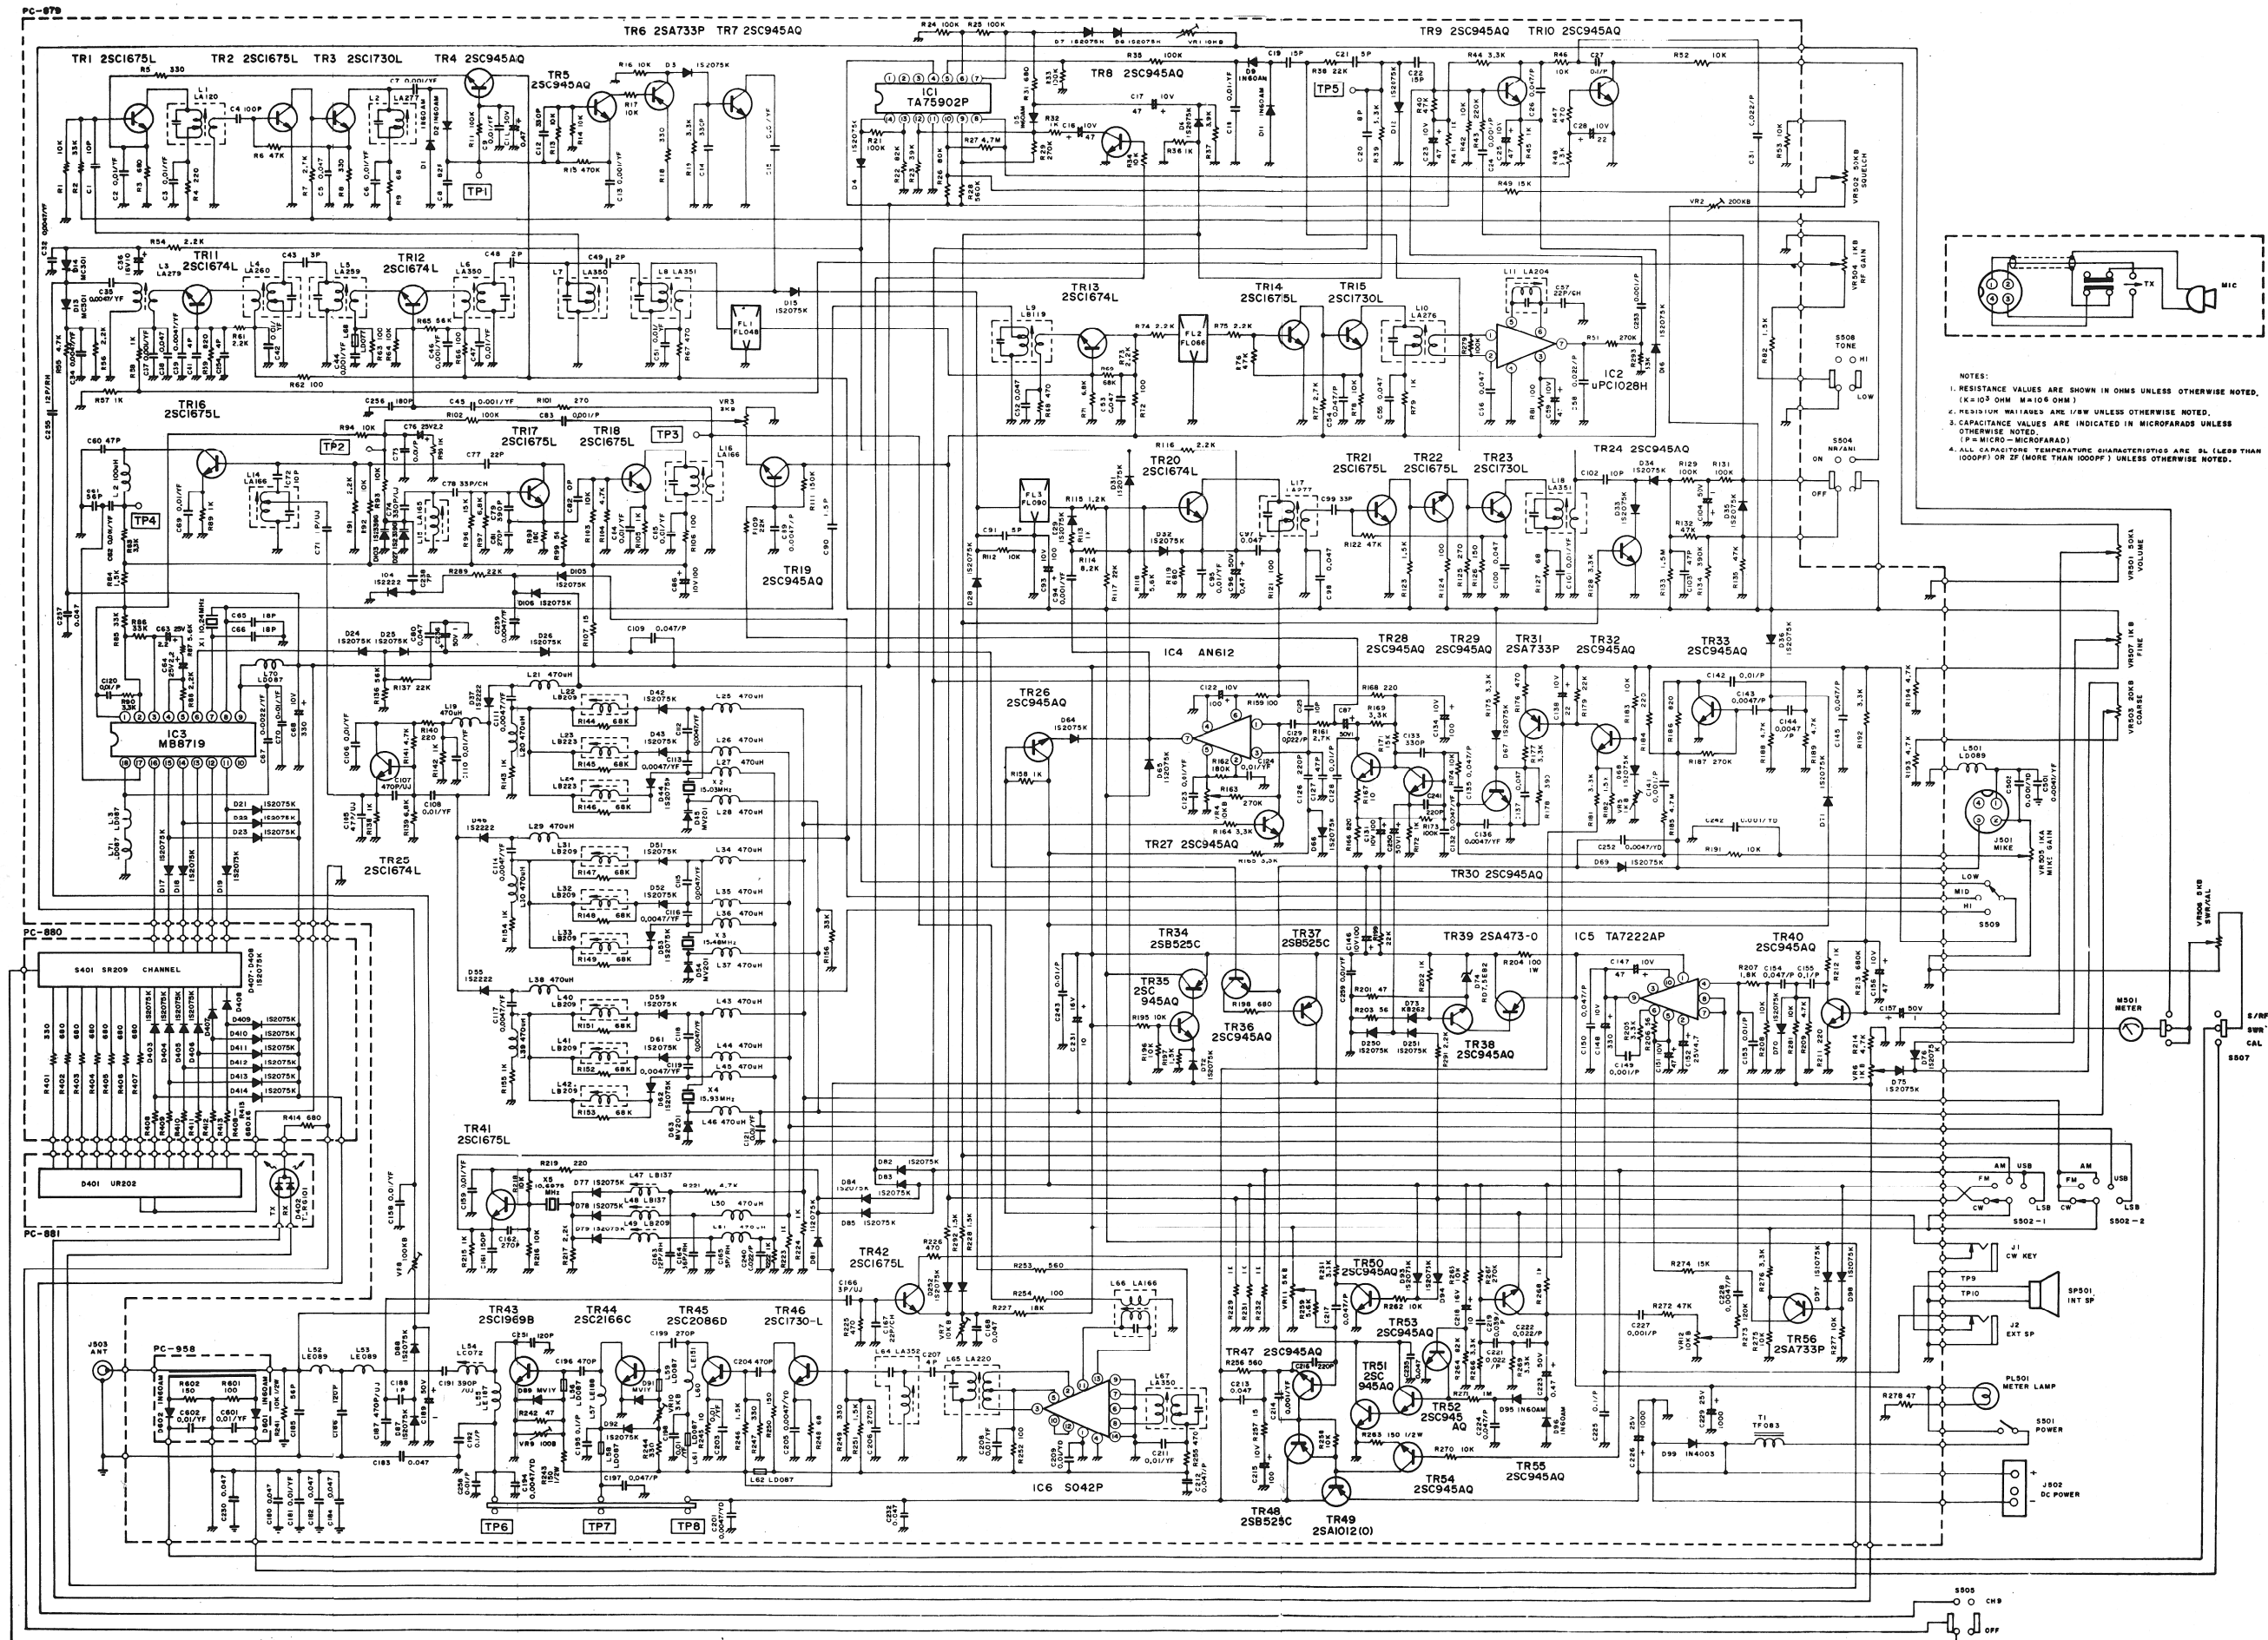

NOTES:
 1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED.
 (K=10³ OHM M=10⁶ OHM)
 2. RESISTOR RATINGS ARE 1/8W UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED.
 (P=PICTO-MICROFARAD)
 4. ALL CAPACITOR TEMPERATURE CHARACTERISTICS ARE 5% (LESS THAN 100PPM) OR 2% (MORE THAN 100PPM) UNLESS OTHERWISE NOTED.