


# CIRCUIT DIAGRAM FOR COBRA 66GTL



- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS, UNLESS OTHERWISE NOTED.  
(K=10<sup>3</sup> OHM, M=10<sup>6</sup> OHM)
  2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED.  
(P=PICO-MICROFARAD)
  4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE YF UNLESS OTHERWISE SPECIFIED.

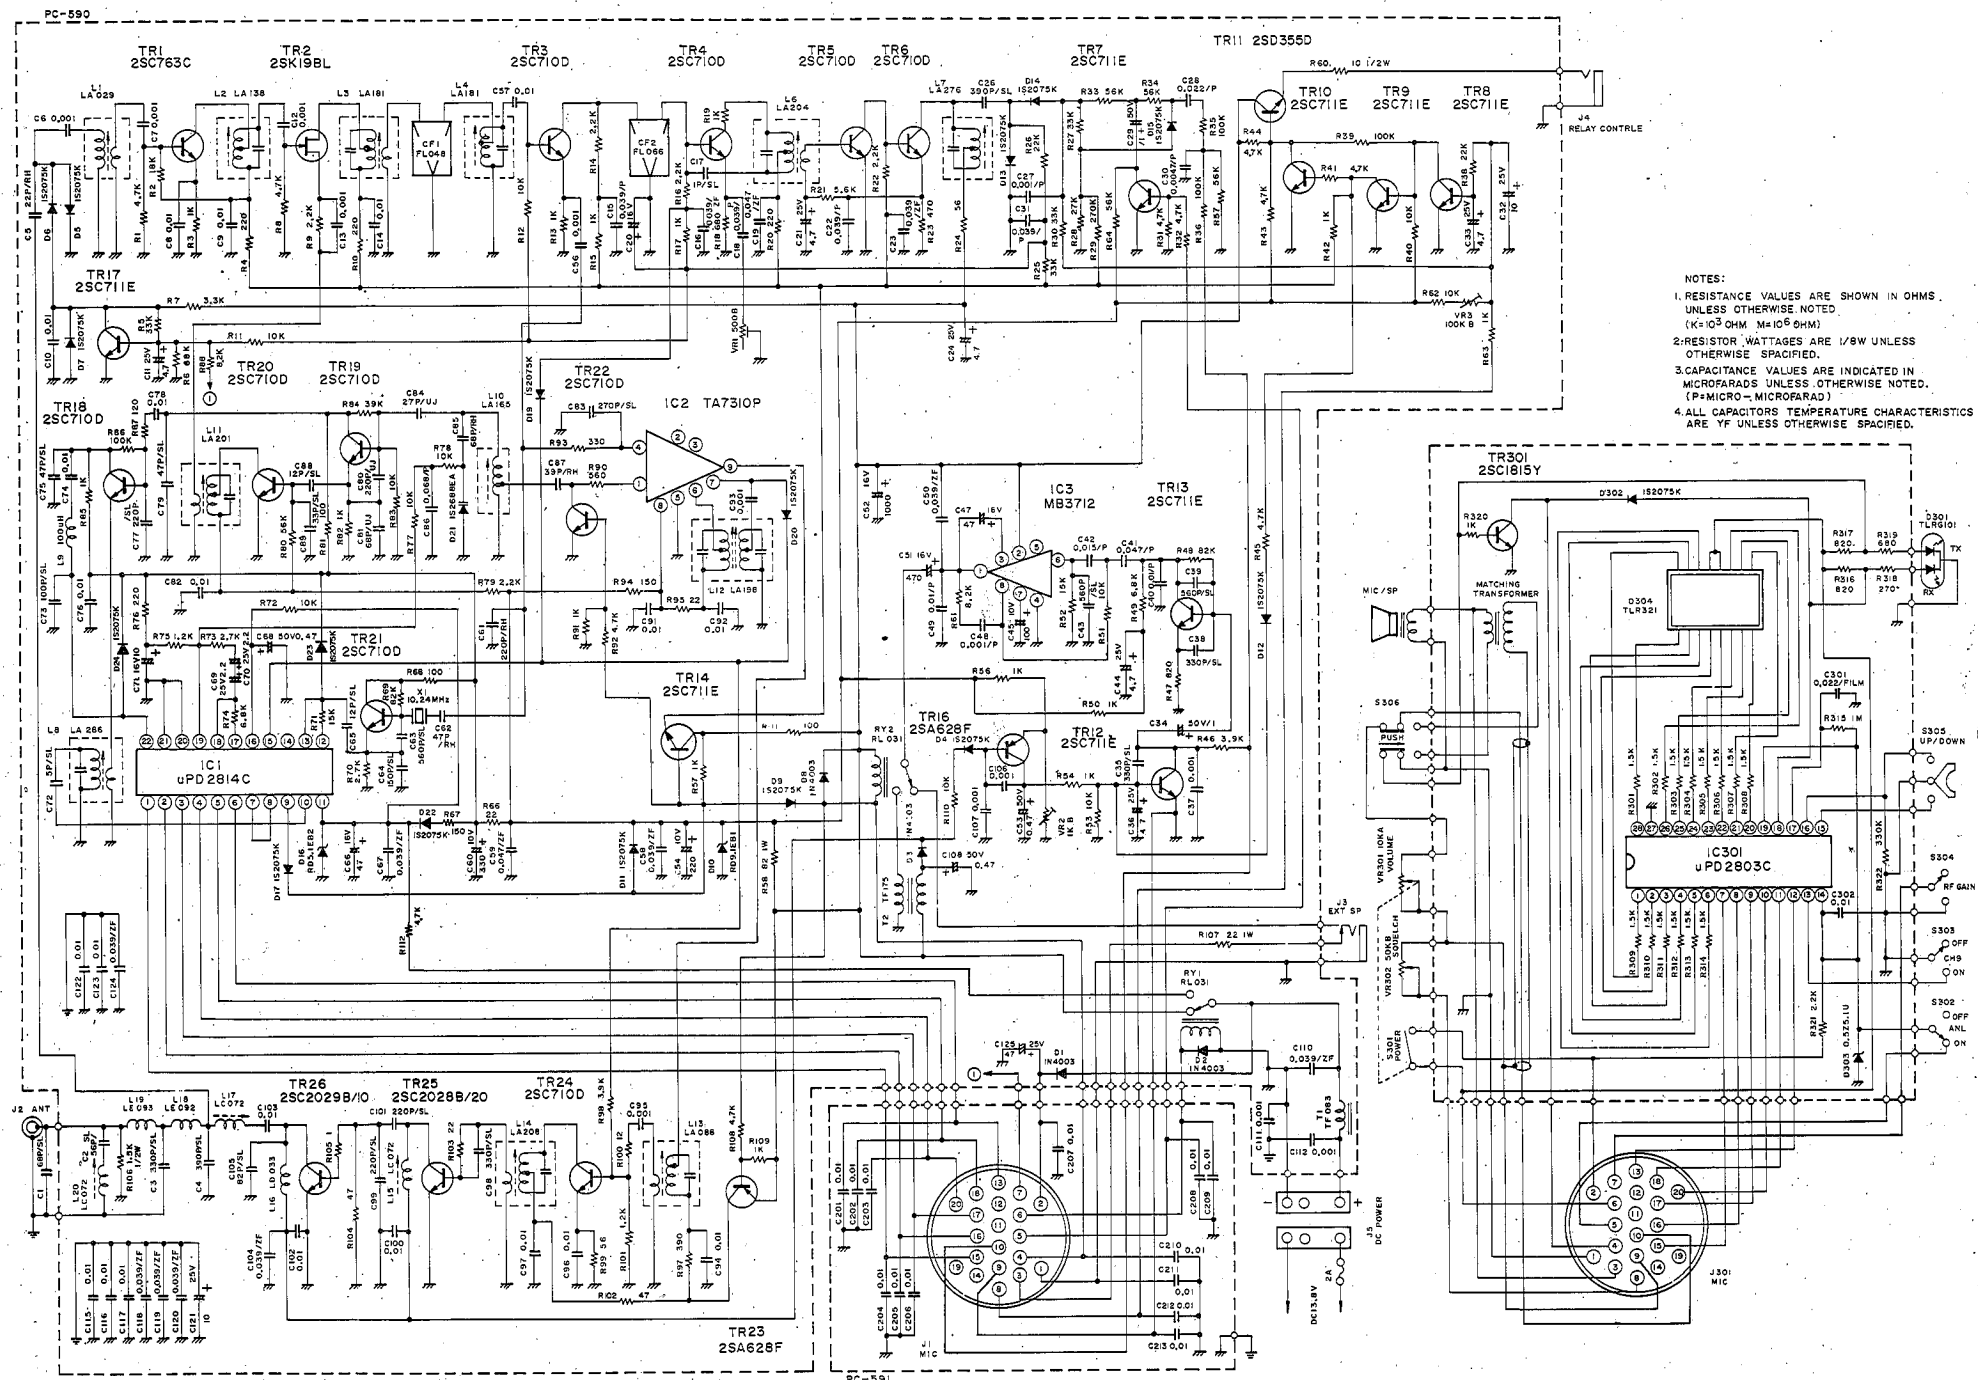